

RWY	DIRECTION	THR	BEARING STRENGTH
18	184	12 41 43.40 N 101 00 22.54 E	PCN 59/F/B/X/T
36	004	12 39 51.33 N 101 00 13.30 E	

APRONS
STRENGTH APRON A, B : PCN 39/R/B/X/T Apron C: PCN 40/R/B/X/T
Apron D: PCN 77/R/B/X/T

ELEVATIONS IN FEET AND DIMENSION
IN METRES BEARING ARE MAGNETIC


VAR 01°N
(2001)
ANNUAL RATE
OF CHANGE 3'E

- BASEOPS
- ABN
- RADAR STN
- FIRE AND RESCUE STN
- CARGO
- MET

PASSENGER TERMINAL

3505 X 60 m ASPH CONC
STRIP 4235 X 300


TACAN
CH 105




LEGEND

VOR CHECK POINT

MARKING AIDS STOPWAY RWY 18 / 36



GULF OF THAILAND

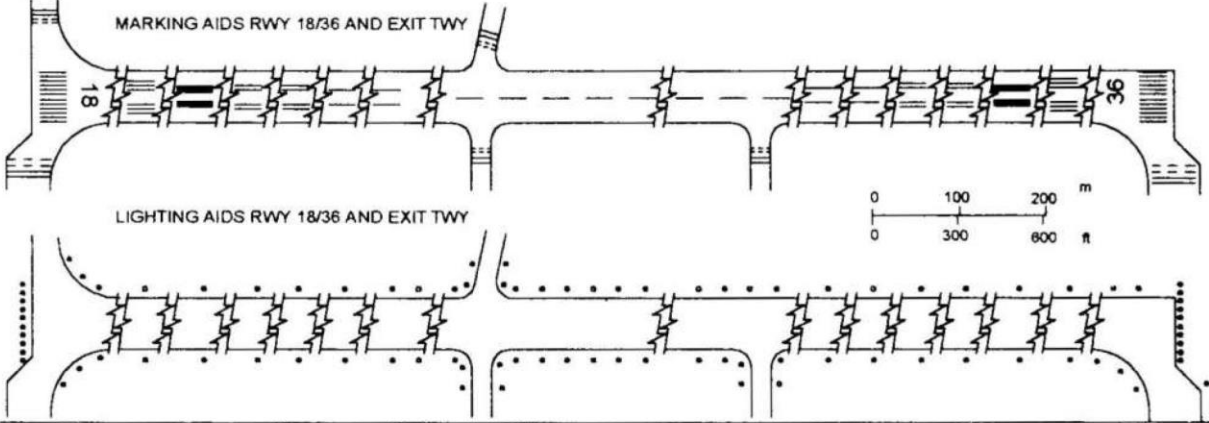

CHANGE : APRON A, B AND C STRENGTH, WDI ADDED.