


**STANDARD ARRIVAL CHART-
INSTRUMENT (STAR) - ICAO**

TRANSITION ALTITUDE 11000 FT	APP : 119.1, 262.5 : 119.4, 262.5 : 120.3, 262.5 : 121.7, 262.5 : 122.35, 262.5 : 124.35, 262.5 : 125.2, 262.5
SPEED RESTRICTION MAX IAS 250 KT AT OR BELOW ALT 10000 FT UNLESS OTHERWISE AUTHORIZED BY ATC.	DAR : 125.5, 262.5 TWR : 118.1, 236.6 ATIS : 126.4, 344.6

**BANGKOK/Don Mueang Intl (VTBD)
RNAV RWY03L/03R**

ENDUU1B NAKON1B
SABAI1B SEHNA1B WEHHA1B

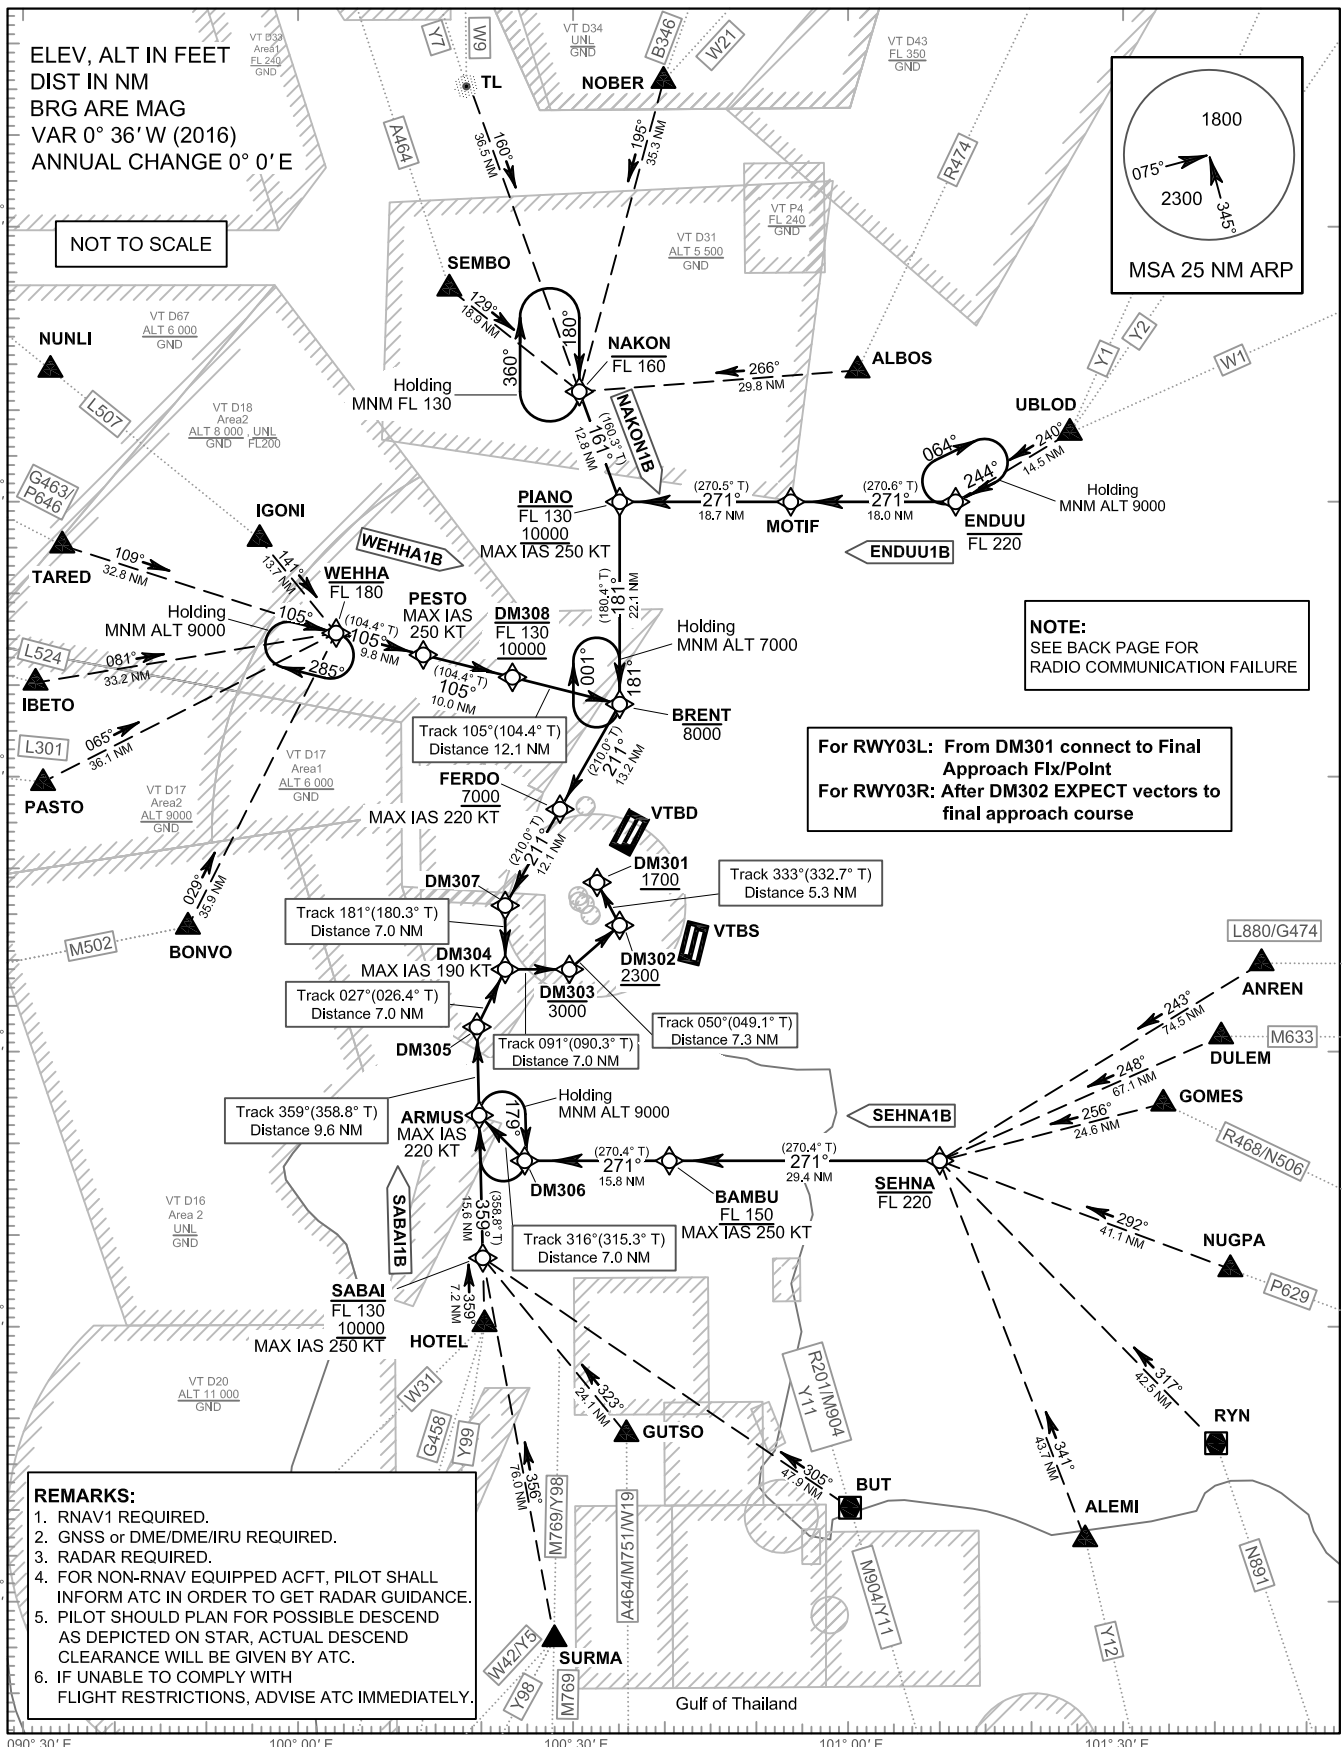

NOTE:
SEE BACK PAGE FOR
RADIO COMMUNICATION FAILURE

**For RWY03L: From DM301 connect to Final
Approach Fix/Point**
**For RWY03R: After DM302 EXPECT vectors to
final approach course**

- REMARKS:**
1. RNAV1 REQUIRED.
 2. GNSS or DME/DME/IRU REQUIRED.
 3. RADAR REQUIRED.
 4. FOR NON-RNAV EQUIPPED ACFT, PILOT SHALL INFORM ATC IN ORDER TO GET RADAR GUIDANCE.
 5. PILOT SHOULD PLAN FOR POSSIBLE DESCEND AS DEPICTED ON STAR, ACTUAL DESCEND CLEARANCE WILL BE GIVEN BY ATC.
 6. IF UNABLE TO COMPLY WITH FLIGHT RESTRICTIONS, ADVISE ATC IMMEDIATELY.

CHANGE: L880 M633 N506 AND P629 ADDED. ANREN DULEM AND NUGPA TRANSITION WAYPOINT ADDED. CANCEL BATOK TRANSITION WAYPOINT.