

AERODROME CHART - ICAO

13 54 52 N
100 36 20 E


ELEV 9 FT

TWR 118.1

BANGKOK / Don Mueang Intl


RWY	DIRECTION	THR	BEARING	STRENGTH
03L	029	13 53 49.24 N 100 35 45.38 E	PCN 115/F/B/W/T	
21R	209	13 55 34.87 N 100 36 44.62 E		
03R	028	13 53 58.45 N 100 36 05.50 E	PCN 126/F/D/W/T	
21L	208	13 55 28.41 N 100 36 55.96 E		
NORTH APRON			PCN 85/R/B/W/T	
PIER 2-3			PCN 69/R/B/W/T	
PIER 3-4			PCN 60/R/B/W/T	
PIER 4-5			PCN 48/R/B/W/T	
PIER 5-6			PCN 69/R/B/W/T	
PIER 6			PCN 68/R/B/W/T	
SOUTH APRON			PCN 74/R/B/W/T	

ELEVATIONS IN FEET AND DIMENSIONS IN METRES
BEARING ARE MAGNETIC

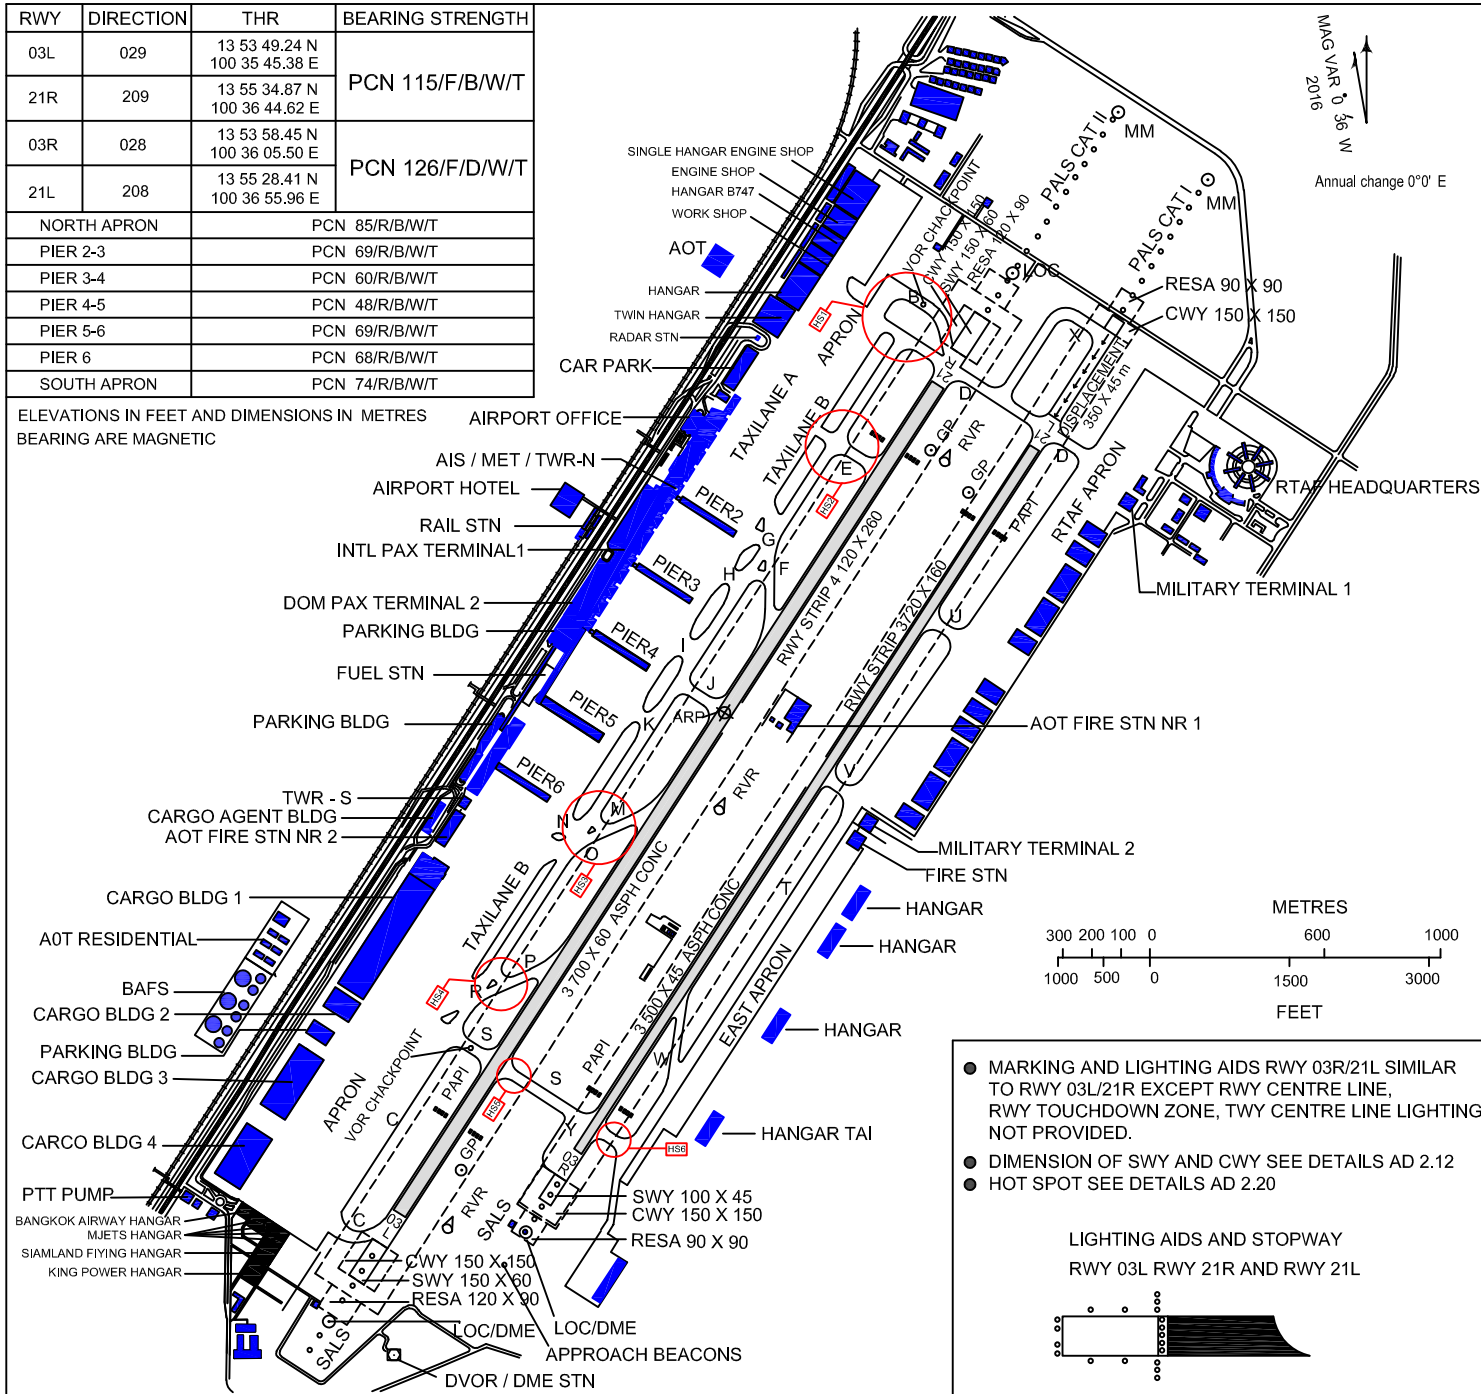


- MARKING AND LIGHTING AIDS RWY 03R/21L SIMILAR TO RWY 03L/21R EXCEPT RWY CENTRE LINE, RWY TOUCHDOWN ZONE, TWY CENTRE LINE LIGHTING NOT PROVIDED.
- DIMENSION OF SWY AND CWY SEE DETAILS AD 2.12
- HOT SPOT SEE DETAILS AD 2.20


LIGHTING AIDS AND STOPWAY
RWY 03L RWY 21R AND RWY 21L



MARKING AIDS RWY 03L/21R AND EXIT TWY

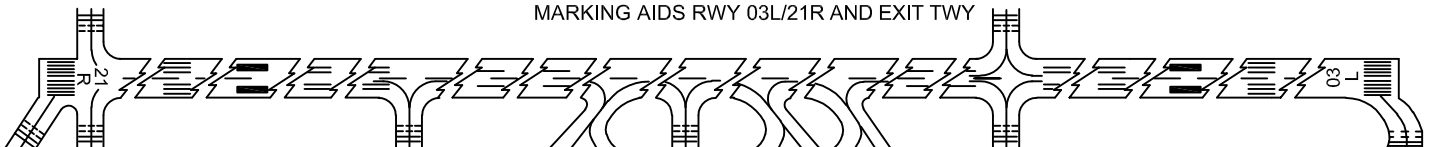

LIGHTING AIDS RWY 03L/21R AND EXIT TWY

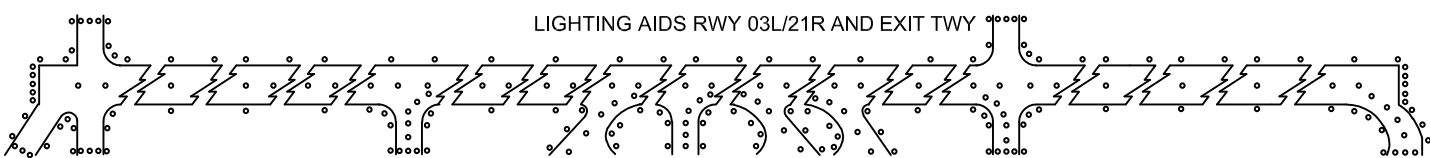

0 100 200 300 400 500 600 METRES
0 500 1000 2000 FEET

CHANGE: HOT SPOT ADDED. RWY 03L PCN. RWY21R PCN. APRON PCN. PIER PCN ADDED.