

AERODROME CHART - ICAO

13 54 52 N  
100 36 20 E


ELEV 9 FT

TWR 118.1


BANGKOK / DON MUEANG INTL.

RWY	DIRECTION	THR	BEARING STRENGTH
03L	029	13 53 49.24 N 100 35 45.38 E	PCN 102 F/C/W/T ASPHALT 217 M FM THR AND 122 M RWY ENDS ARE PCN 124/R/C/W/T CONCRETE SWY IS ASPHALT (PCN 37/F/C/X/T)
21R	209	13 55 34.87 N 100 36 44.62 E	PCN 102 F/C/W/T ASPHALT 122 M FM THR AND 217 M RWY ENDS ARE PCN 124/R/C/W/T CONCRETE SWY IS ASPHALT (PCN 37/F/C/X/T)
03R	028	13 53 58.45 N 100 36 05.50 E	PCN 126/F/D/W/T
21L	208	13 55 28.41 N 100 36 55.96 E	
NORTH APRON			PCN 85/R/B/W/T
PIER 2-3 APRON			PCN 69/R/B/W/T
PIER 3-4 APRON			PCN 60/R/B/W/T
PIER 4-5 APRON			PCN 48/R/B/W/T
PIER 5-6 APRON			PCN 69/R/B/W/T
PIER 6 APRON			PCN 68/R/B/W/T
SOUTH APRON			PCN 74/R/B/W/T


ELEVATIONS IN FEET AND DIMENSIONS IN METRES  
BEARING ARE MAGNETIC

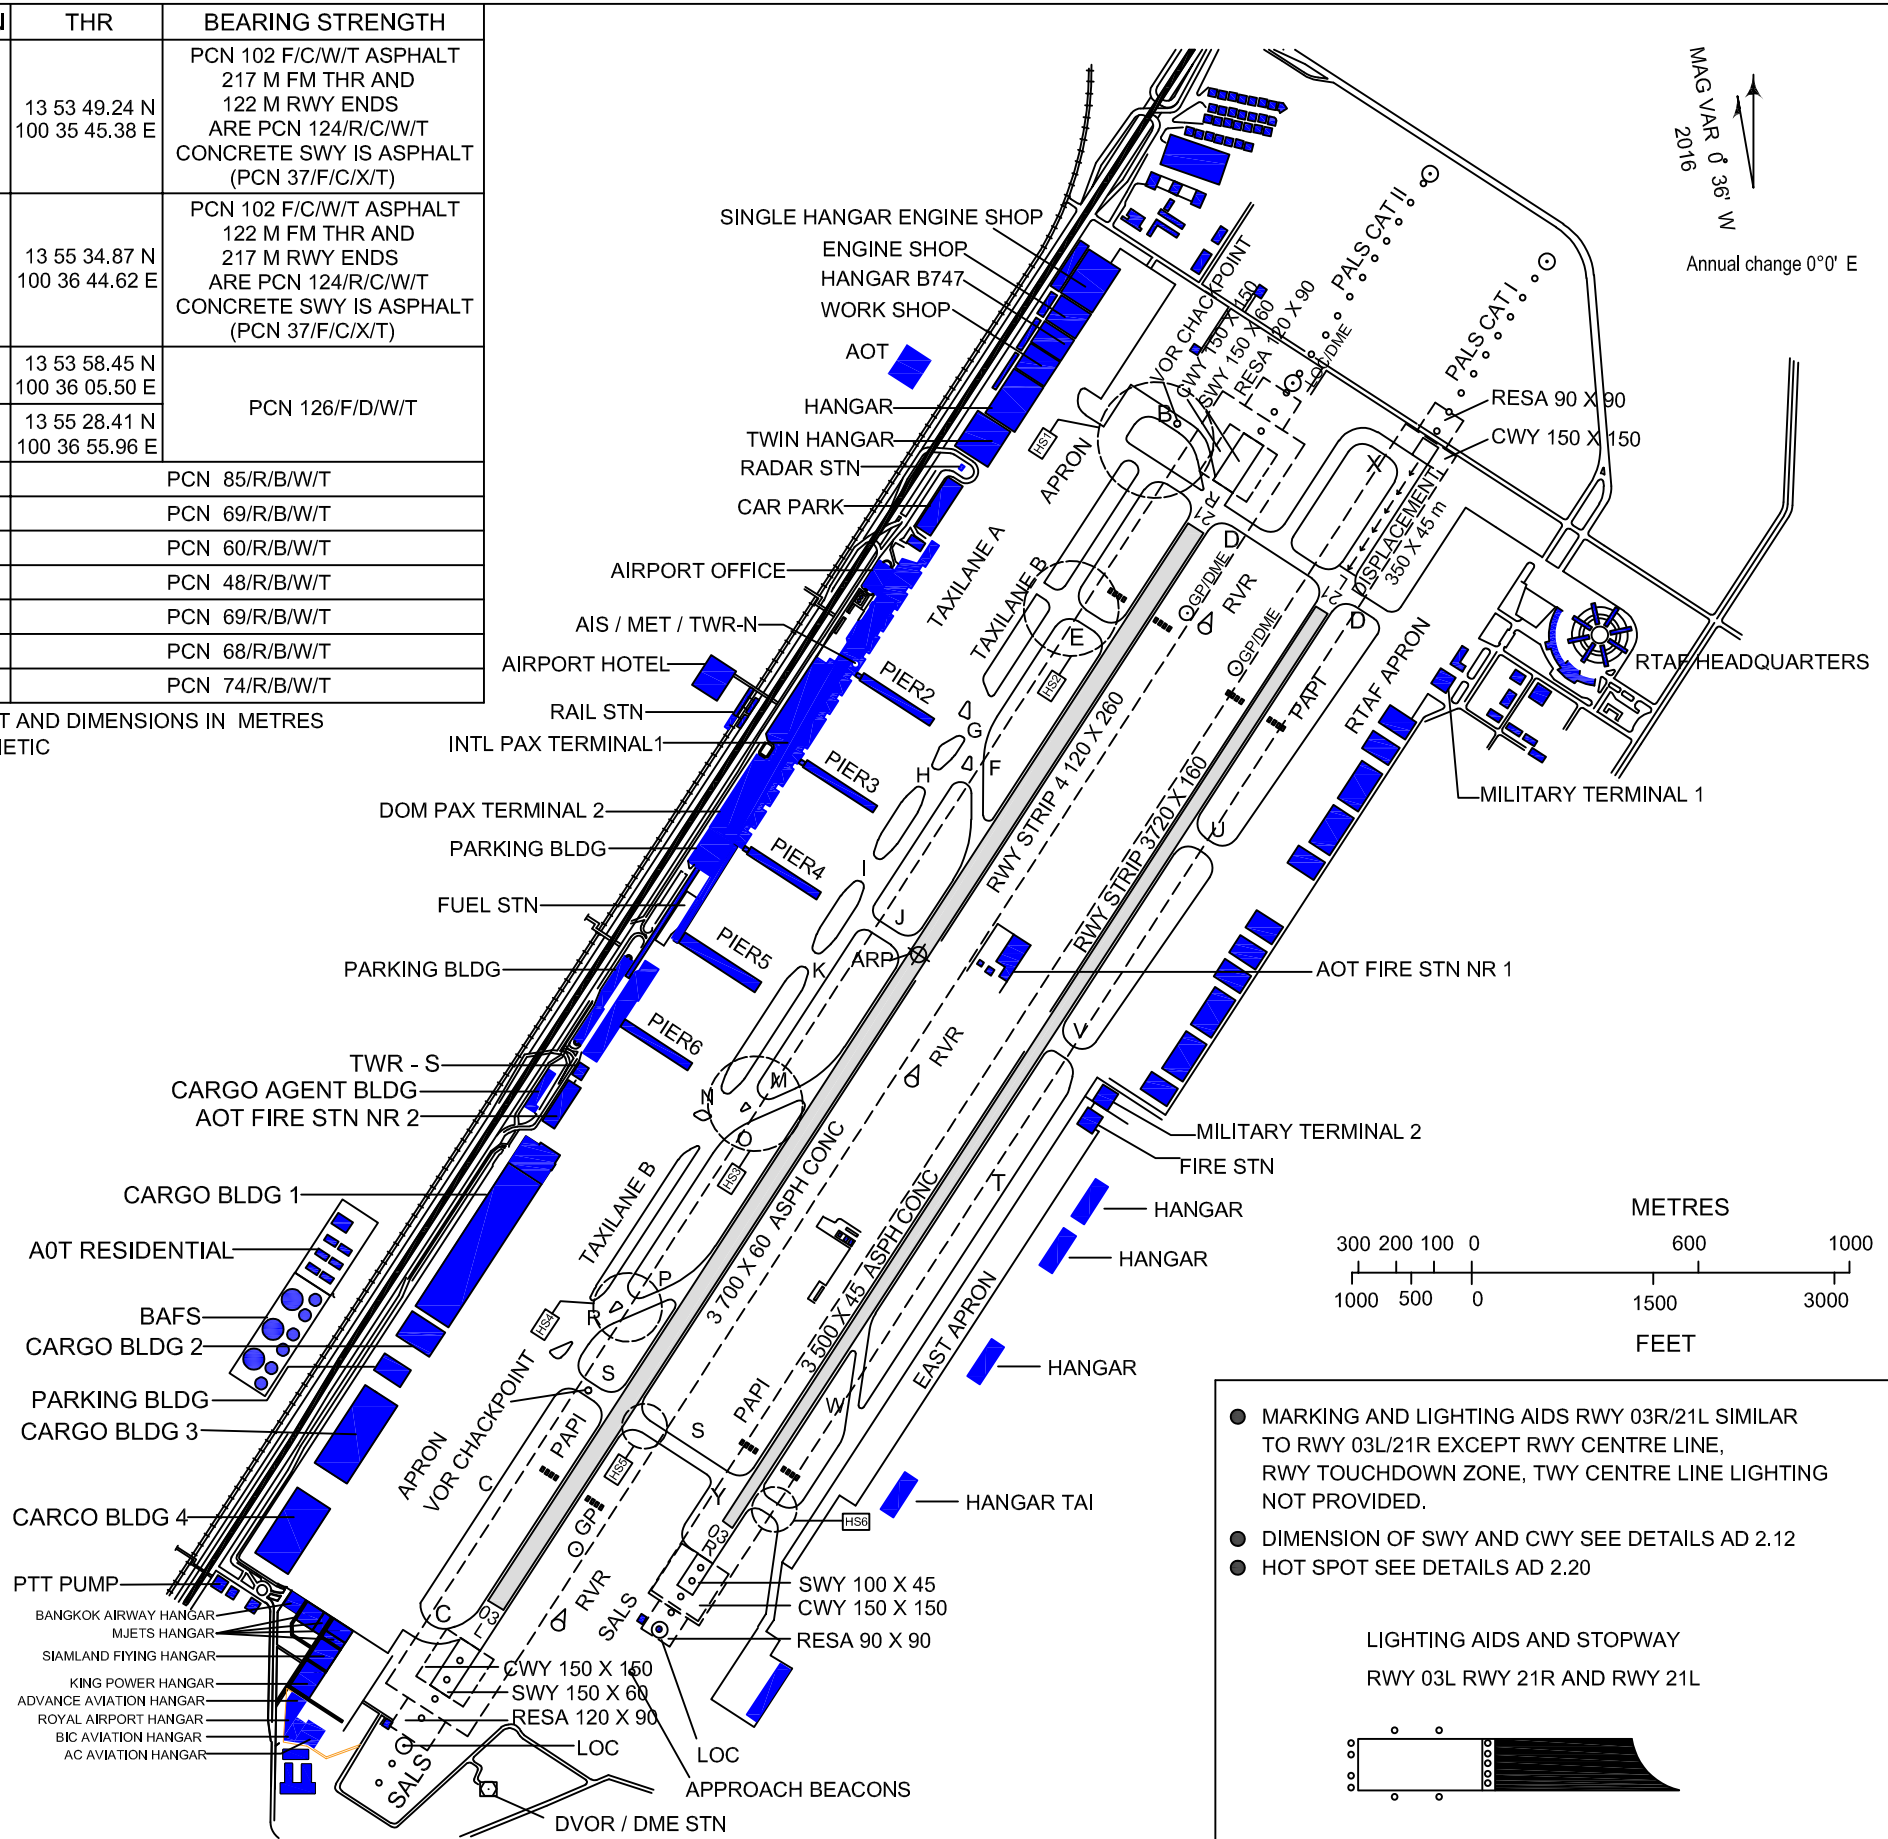

MAG VAR of 36° W  
2016  
Annual change 0°0' E

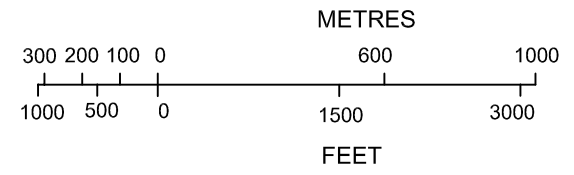

- MARKING AND LIGHTING AIDS RWY 03R/21L SIMILAR TO RWY 03L/21R EXCEPT RWY CENTRE LINE, RWY TOUCHDOWN ZONE, TWY CENTRE LINE LIGHTING NOT PROVIDED.
- DIMENSION OF SWY AND CWY SEE DETAILS AD 2.12
- HOT SPOT SEE DETAILS AD 2.20

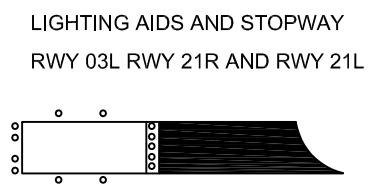

CHANGE : BEARING STRENGTH

