

AERODROME CHART - ICAO

06 55 58 N
100 23 42 E

ELEV 90 FT


TWR 118.1

SONGKHLA / Hat Yai Intl

RWY	DIRECTION	THR	BEARING STRENGTH
08	082	06 55 51.55 N 100 22 49.84 E	PCN 60/F/C/X/T 2450 M PCN 60/R/C/X/T 600 M, SWY IS ASPHALT
26	262	06 56 03.92 N 100 24 28.30 E	PCN 60/F/C/X/T 2450 M PCN 60/R/C/X/T 600 M, SWY IS ASPHALT
TAXIWAY A,B,C			PCN 60/F/C/X/T PCN 60/R/C/X/T
TAXIWAY G,H			PCN 60/F/C/X/T
TAXIWAY D,E,F,R,Q			PCN 60/R/C/X/T
APRON , TAXILANE N			PCN 60/R/C/X/T

MAG VAR 0°17' W (2016)
Annual change 0°1' E

ELEVATIONS IN FEET AND DIMENSIONS IN METRES
BEARING ARE MAGNETIC

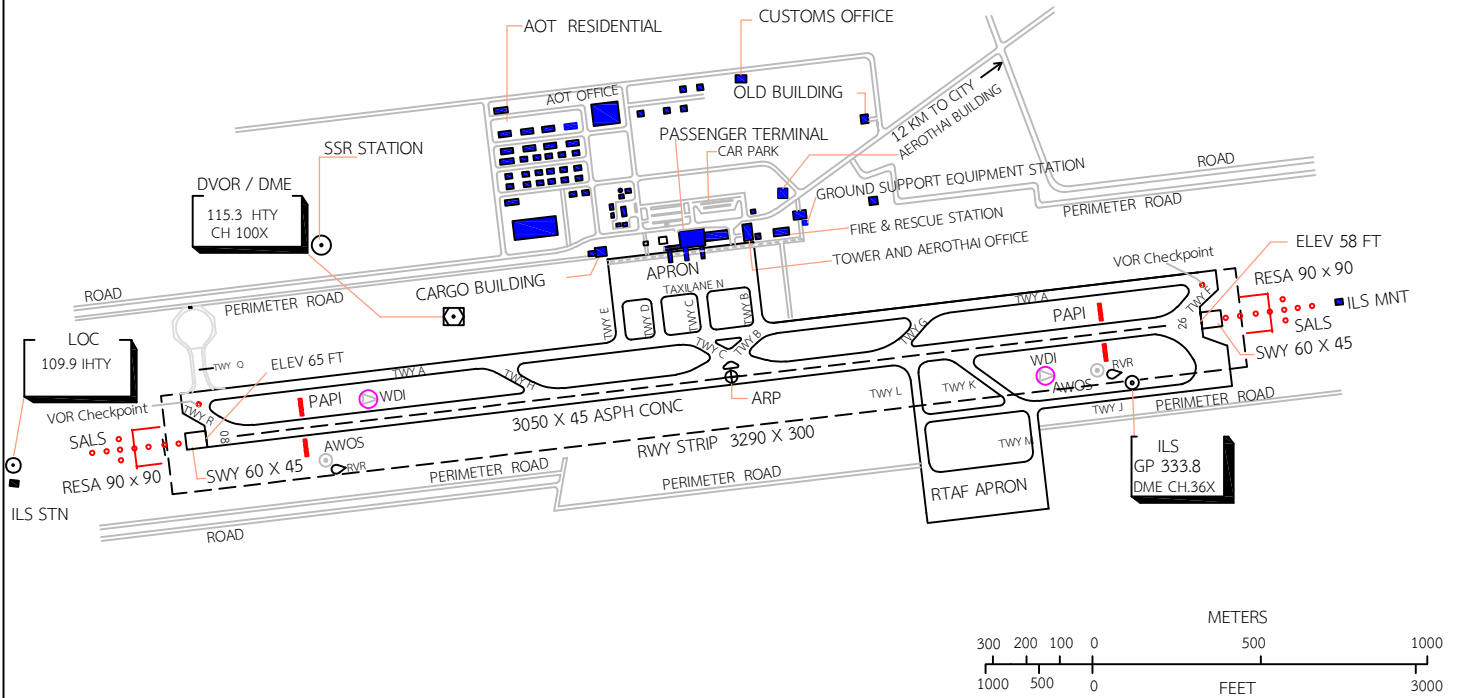

CHANGE : REVISED BEARING STRENGTH

LEGEND	
AERODROME REFERENCE POINT	
BUILDING	
ROADS	
WIND DIRECTION INDICATOR	

LIGHTING AIDS :	RWY LIGHT : WHITE
	TWY LIGHT : BLUE
	THR/END LIGHT : GREEN/RED
	BIDIRECTIONAL
	STOPWAY LIGHT : RED

