


RWY	DIRECTION (TRUE BRG)	THR	BEARING STRENGTH
01	016.47°	17 25 48.12 N 101 43 09.10 E	PCN 42/F/C/X/T
19	196.47°	17 26 53.63 N 101 43 29.77 E	
APRON			PCN 45/R/C/X/T
TWY A AND B			PCN 42/F/C/X/T

ELEVATIONS IN FEET AND DIMENSIONS IN METRES  
BEARINGS ARE MAGNETIC


MAG VAR 0.82°W (2016)  
ANNUAL RATE OF CHANGE 0.0°E

ELEV 817 FT  
SWY 60 x 45  
RESA 240 x 90  
SALS

DVOR/DME  
LOY 115.9  
CH 106X

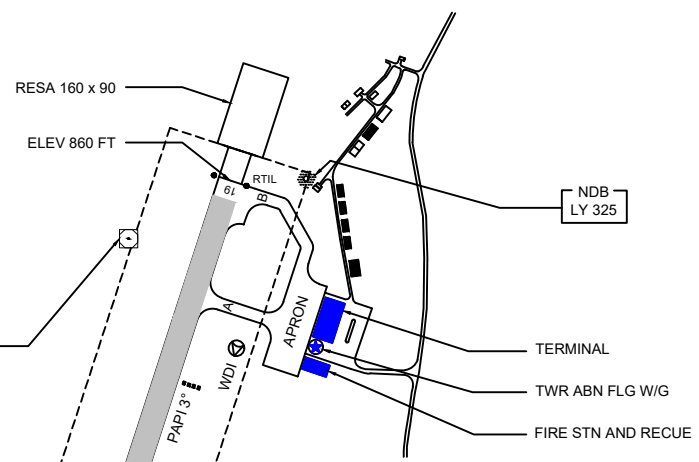


ARP  
2100 x 45 ASPH CONC  
STRIP 2280 x 280

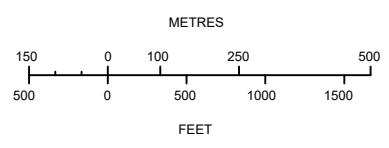


Remark : COORDINATE ARE WGS-84

**MARKING AIDS RWY 01/19 AND EXIT TWY**

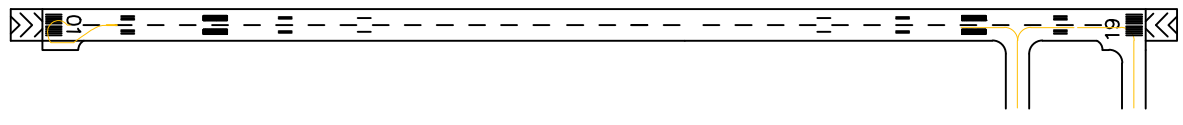

**LIGHTING AIDS RWY 01/19 AND EXIT TWY**

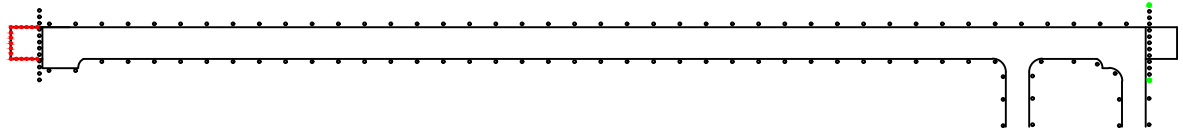

CHANGE : REVISED CHART. TWR FREQ. TABULAR INFO. MAG VAR. ANNUAL RATE OF CHANGE. TDZ ELEV CANCELLED. RESA 01/19 DIMS. RTIL RWY 19. SALS RWY 01. DVOR/DME FREQ. WDI. RIGHT PAPI 01/19 CANCELLED. SWY 01 CANCELLED.