




RWY	DIRECTION (TRUE BRG)	THR	BEARING STRENGTH
01R	14	13 39 24.11 N 100 45 06.59 E	PCN 137/F/D/X/T
19L	194	13 41 30.17 N 100 45 39.72 E	
01L	14	13 40 16.60 N 100 44 04.79 E	PCN 137/F/D/X/T
19R	194	13 42 13.21 N 100 44 35.44 E	
TAXIWAYS			
SURFACE TYPE		ASPH	PCN 137/F/D/X/T
		CONC	PCN 131/R/D/X/T
APRONS			
MAIN / EAST / WEST			PCN 126/R/D/X/T
SAT - 1			PCN 131/R/D/X/T

ELEVATIONS IN FEET
DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC

MAG VAR 0°35' W (2016)
ANNUAL CHANGE 0° 0' E

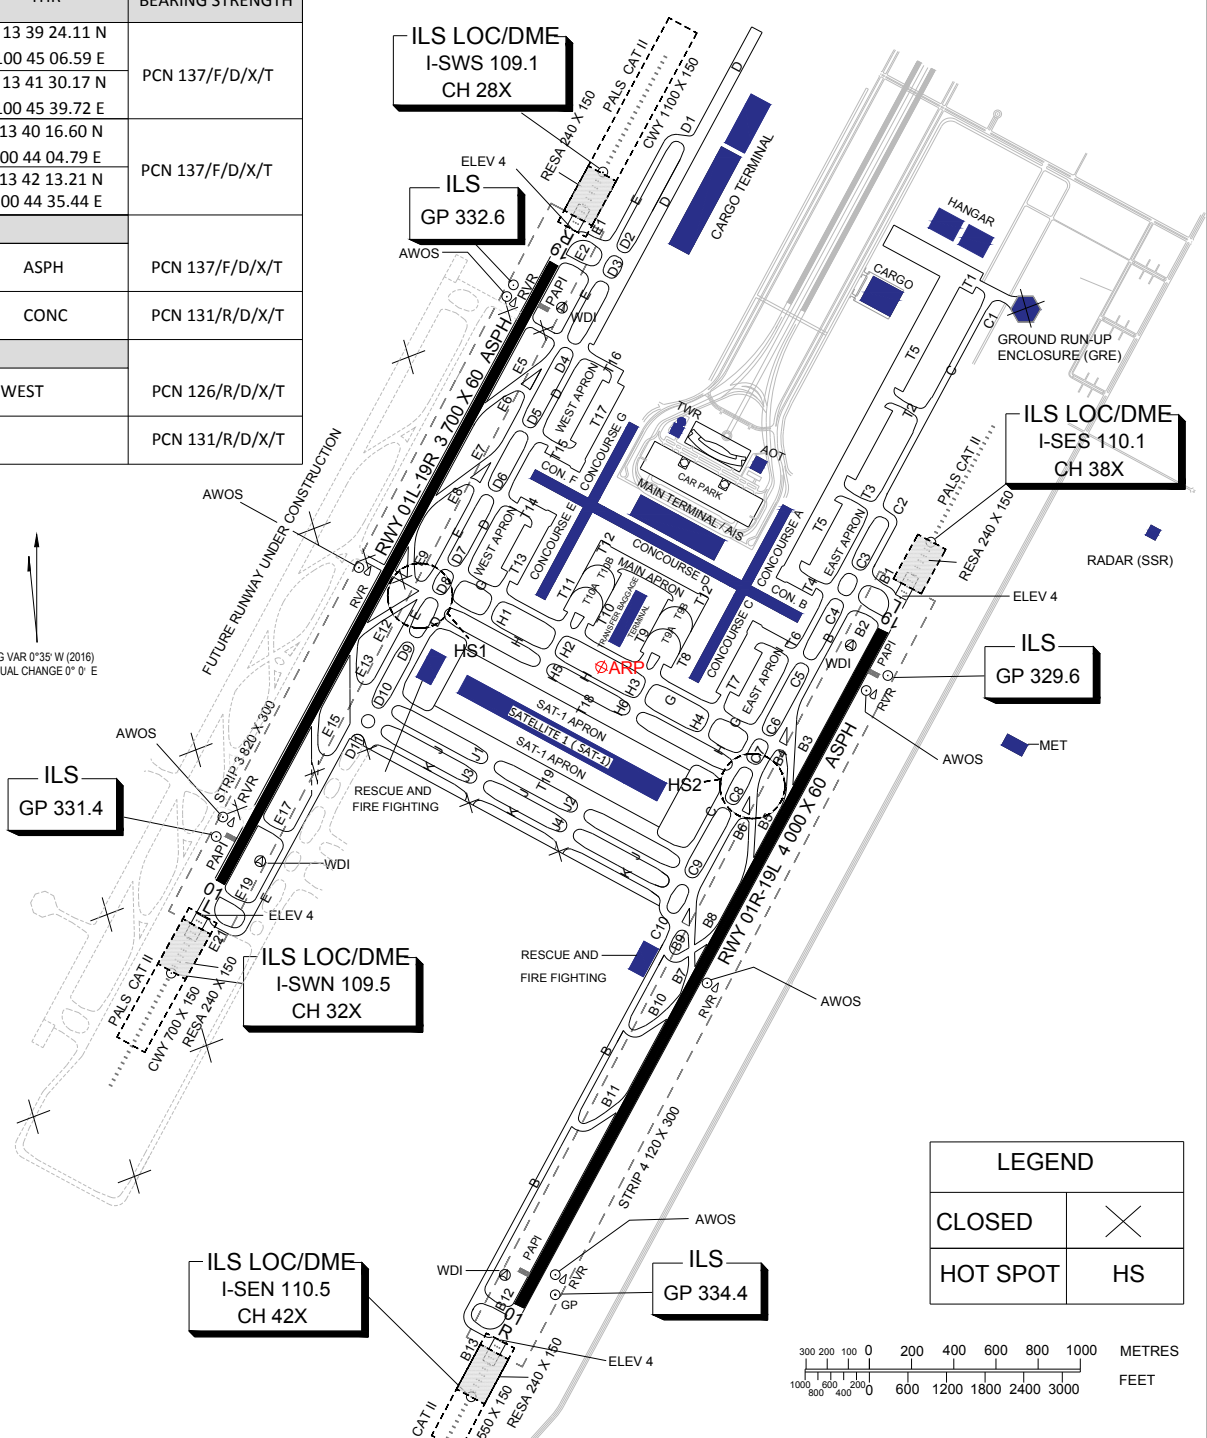


LEGEND	
CLOSED	✕
HOT SPOT	HS




MARKING AND LIGHTING AIDS
RWY 01L/19L SIMILAR TO RWY 01R/19L

MARKING AIDS RWY 01R/19L AND EXIT TWY

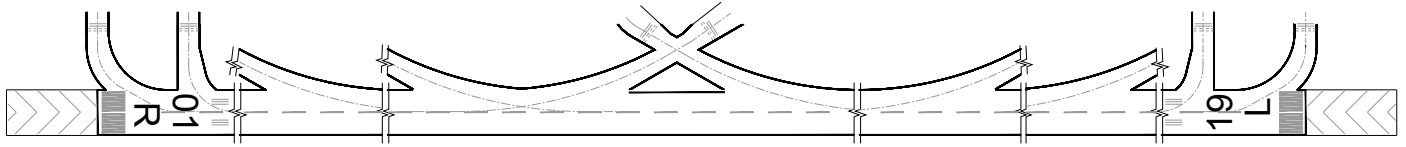

LIGHTING AIDS RWY 01R/19L AND EXIT TWY

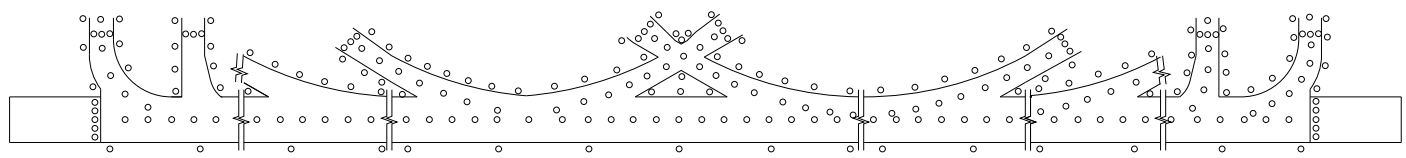

CHANGE : REVISED CHART