

AERODROME CHART - ICAO

06 55 58 N  
100 23 42 E

ELEV 90 FT


TWR 118.1

SONGKHLA / Hat Yai Intl

RWY	DIRECTION	THR	BEARING STRENGTH
08	082	06 55 51.50 N 100 22 49.91 E	PCN 60/F/C/X/T 2450 M PCN 60/R/C/X/T 600 M, SWY IS ASPHALT
26	262	06 56 03.89 N 100 24 28.52 E	PCN 60/F/C/X/T 2450 M PCN 60/R/C/X/T 600 M, SWY IS ASPHALT
TAXIWAY A,B,C			PCN 60/F/C/X/T PCN 60/R/C/X/T
TAXIWAY G,H			PCN 60/F/C/X/T
TAXIWAY D,E,F,R,Q			PCN 60/R/C/X/T
APRON , TAXILANE N			PCN 60/R/C/X/T

MAG VAR 0°17' W (2016)  
Annual change 0°1' E

ELEVATIONS IN FEET AND DIMENSIONS IN METRES  
BEARING ARE MAGNETIC

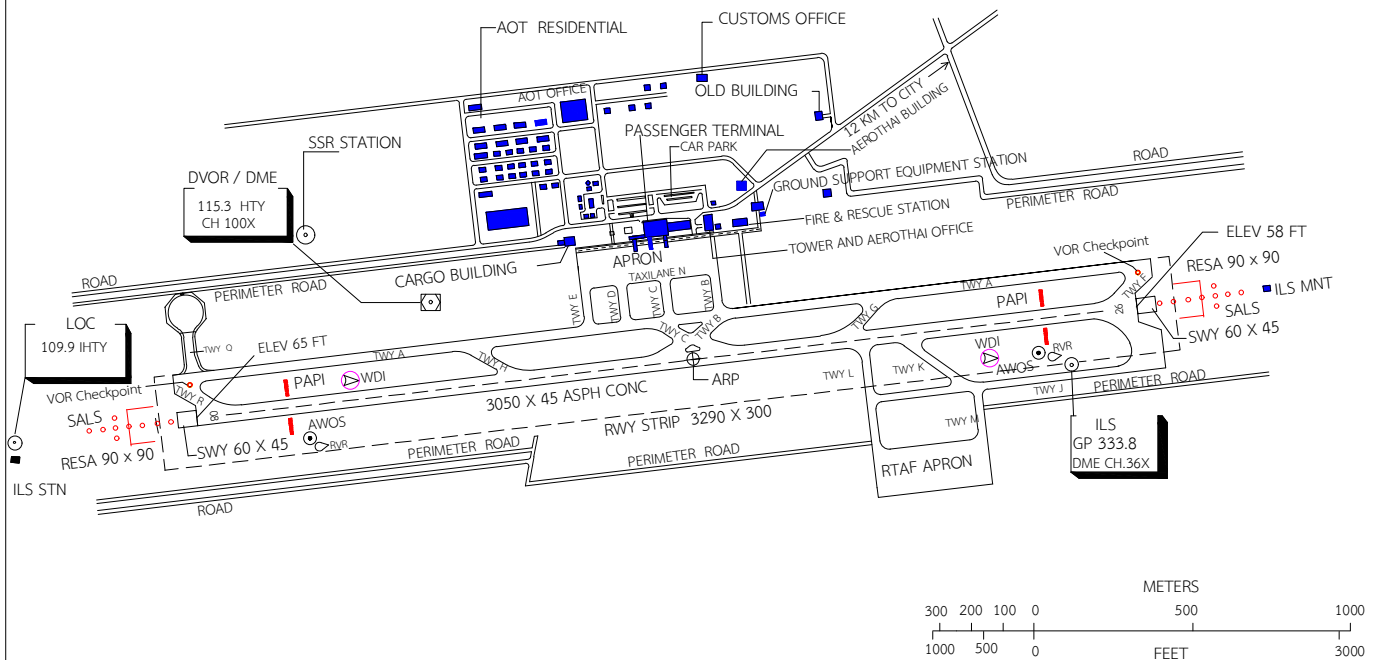


LEGEND


AERODROME REFERENCE POINT	
BUILDING	
ROADS	
WIND DIRECTION INDICATOR	

LIGHTING AIDS :  
 RWY LIGHT : WHITE  
 TWY LIGHT : BLUE  
 THR/END LIGHT : GREEN/RED  
 BIDIRECTIONAL  
 STOPWAY LIGHT : RED

MARKING AIDS RWY 08/26 AND EXIT TWY

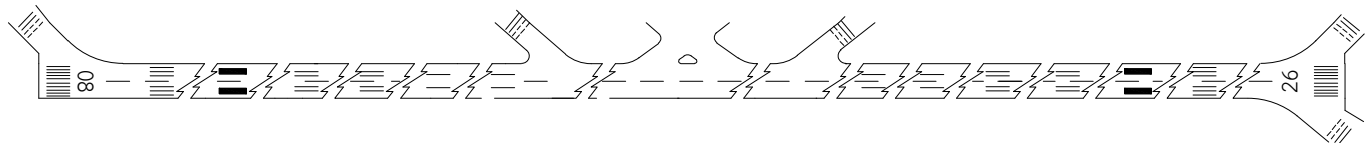

LIGHTING AIDS RWY 08/26 AND EXIT TWY

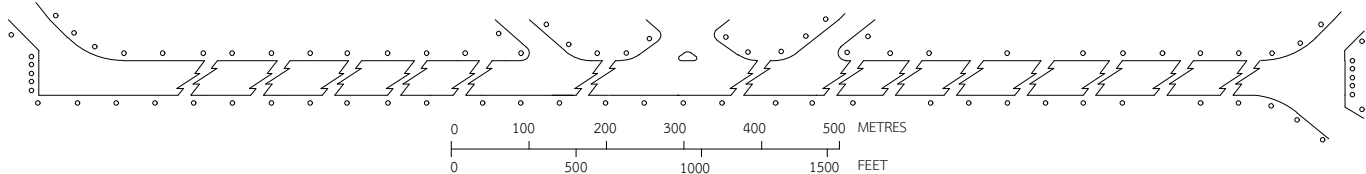

CHANGE : REVISED THR COORDINATES