



RWY	DIRECTION (TRUE BRG)	THR	BEARING STRENGTH
05	051.48°	15 14 34.17N 104 51 33.53E	PCN 61/F/C/X/T
23	231.48°	15 15 34.99N 104 52 52.24E	
APRON			PCN 61/R/C/X/T
TAXIWAY A AND B TAXIWAY C, D, E, F, G, H, I AND J			PCN 61/F/C/X/T NIL

ELEVATION IN FEET
DIMENSIONS IN METERS
BEARINGS ARE MAGNETIC


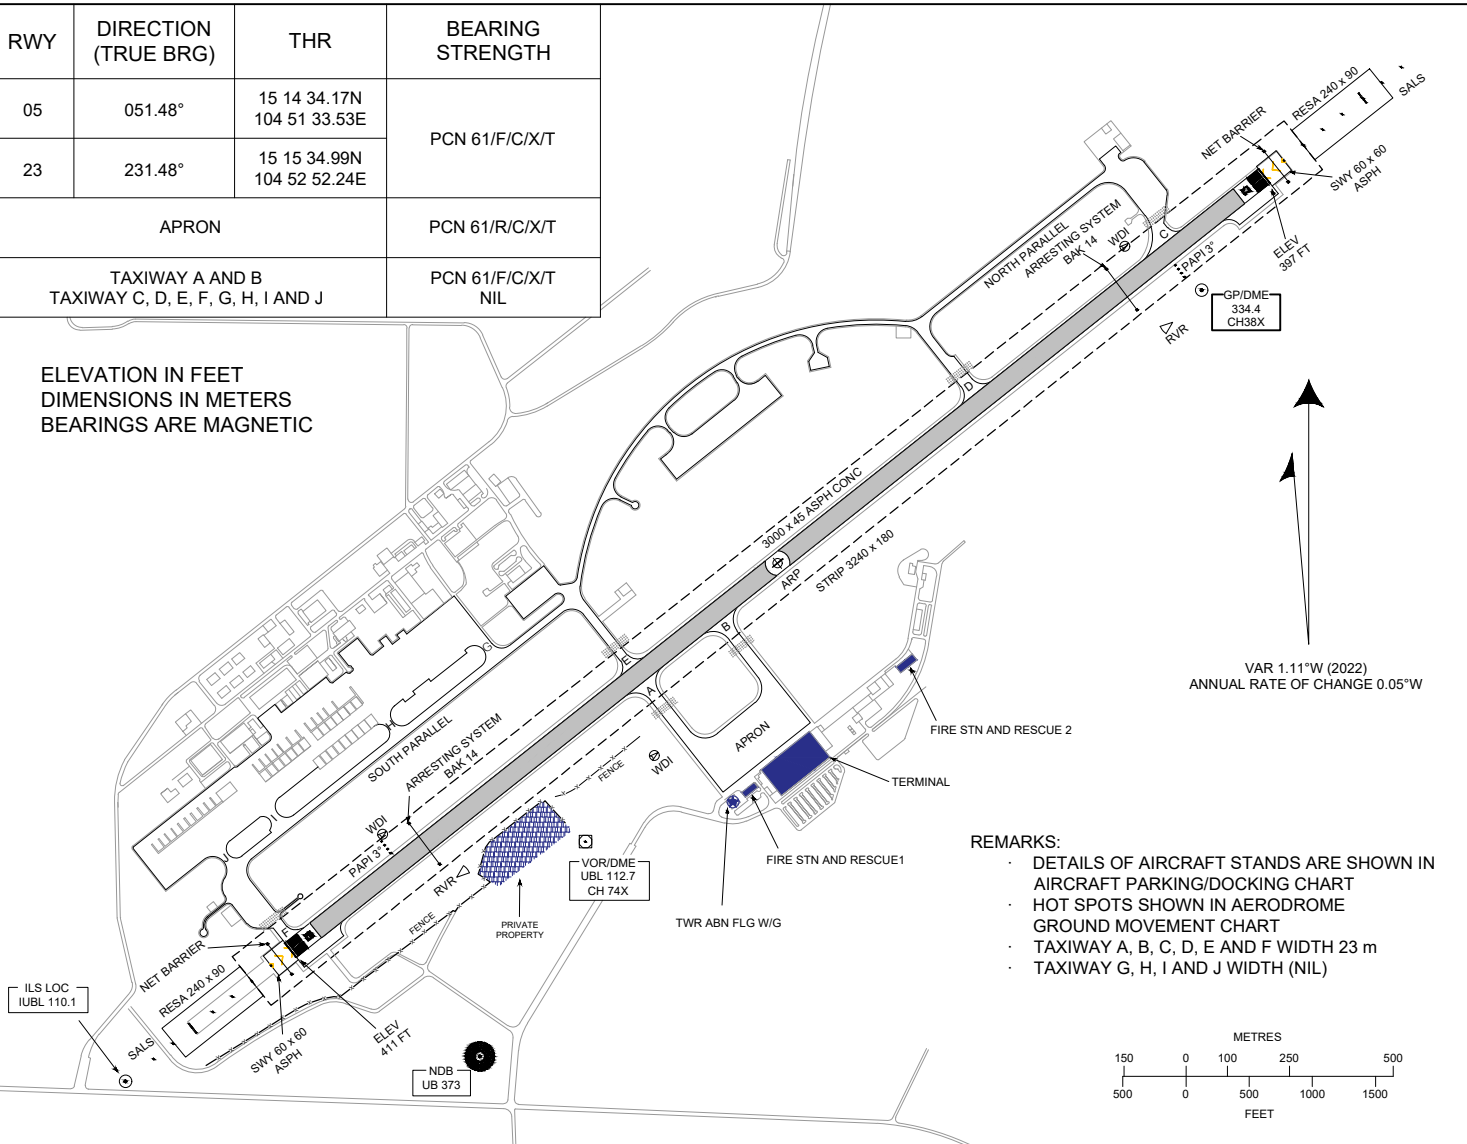


- REMARKS:**
- DETAILS OF AIRCRAFT STANDS ARE SHOWN IN AIRCRAFT PARKING/DOCKING CHART
 - HOT SPOTS SHOWN IN AERODROME GROUND MOVEMENT CHART
 - TAXIWAY A, B, C, D, E AND F WIDTH 23 m
 - TAXIWAY G, H, I AND J WIDTH (NIL)

MARKING AIDS RWY 05/23 AND EXIT TWY

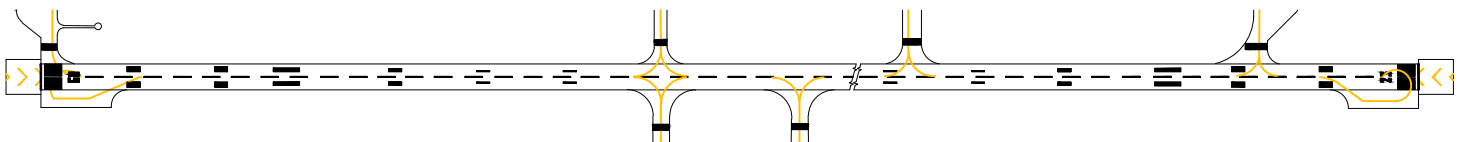

LIGHTING AIDS RWY 05/23 AND EXIT TWY

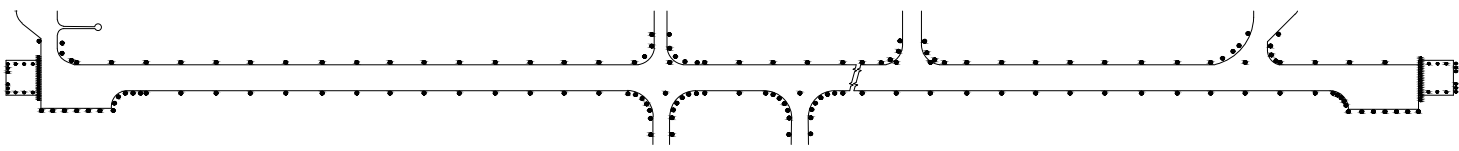

CHANGE: REVISED CHART, MAG VAR, ANNUAL RATE OF CHANGE, TRUE BRG, ARP COORDINATES, RWY COORDINATES, AD THR, THR ELEV.