

# AERODROME CHART - ICAO

06 55 58 N  
100 23 42 E

ELEV 90 FT

TWR 118.1

SONGKHLA / Hat Yai Intl




MAG VAR 0°18' W (2025)  
Annual change 0°2' E


RWY	DIRECTION	THR	BEARING	STRENGTH
08	082°	06° 55' 52" N 100° 22' 50" E	PCR 950/R/B/W/T	600 M, SWY IS ASPHALT PCR 950/F/B/X/T 2450 M
26	262°	06° 56' 04" N 100° 24' 29" E	PCR 950/R/B/W/T	600 M, SWY IS ASPHALT PCR 950/F/B/X/T 2450 M
TAXIWAY A,B,C			PCR 950/F/A/X/T (Asphalt) PCR 950/R/A/W/T (Concrete)	
TAXIWAY D,F			PCR 950/R/A/W/T (Concrete)	
TAXIWAY E			PCR 780/R/A/W/T (Concrete)	
TAXIWAY G			PCR 950/F/D/X/T (Asphalt)	
TAXIWAY H			PCR 950/F/C/X/T (Asphalt)	
APRON, TAXILANE N, TAXIWAY Q,R			PCR 950/R/B/W/T (Concrete)	

ELEVATIONS IN FEET AND DIMENSIONS IN METRES  
BEARING ARE MAGNETIC

CHANGE : ADD MILITARY TERMINAL, REVISE RESA RWY 08/26, SERVICE ROAD, BLAST PAD AND MAG VAR.

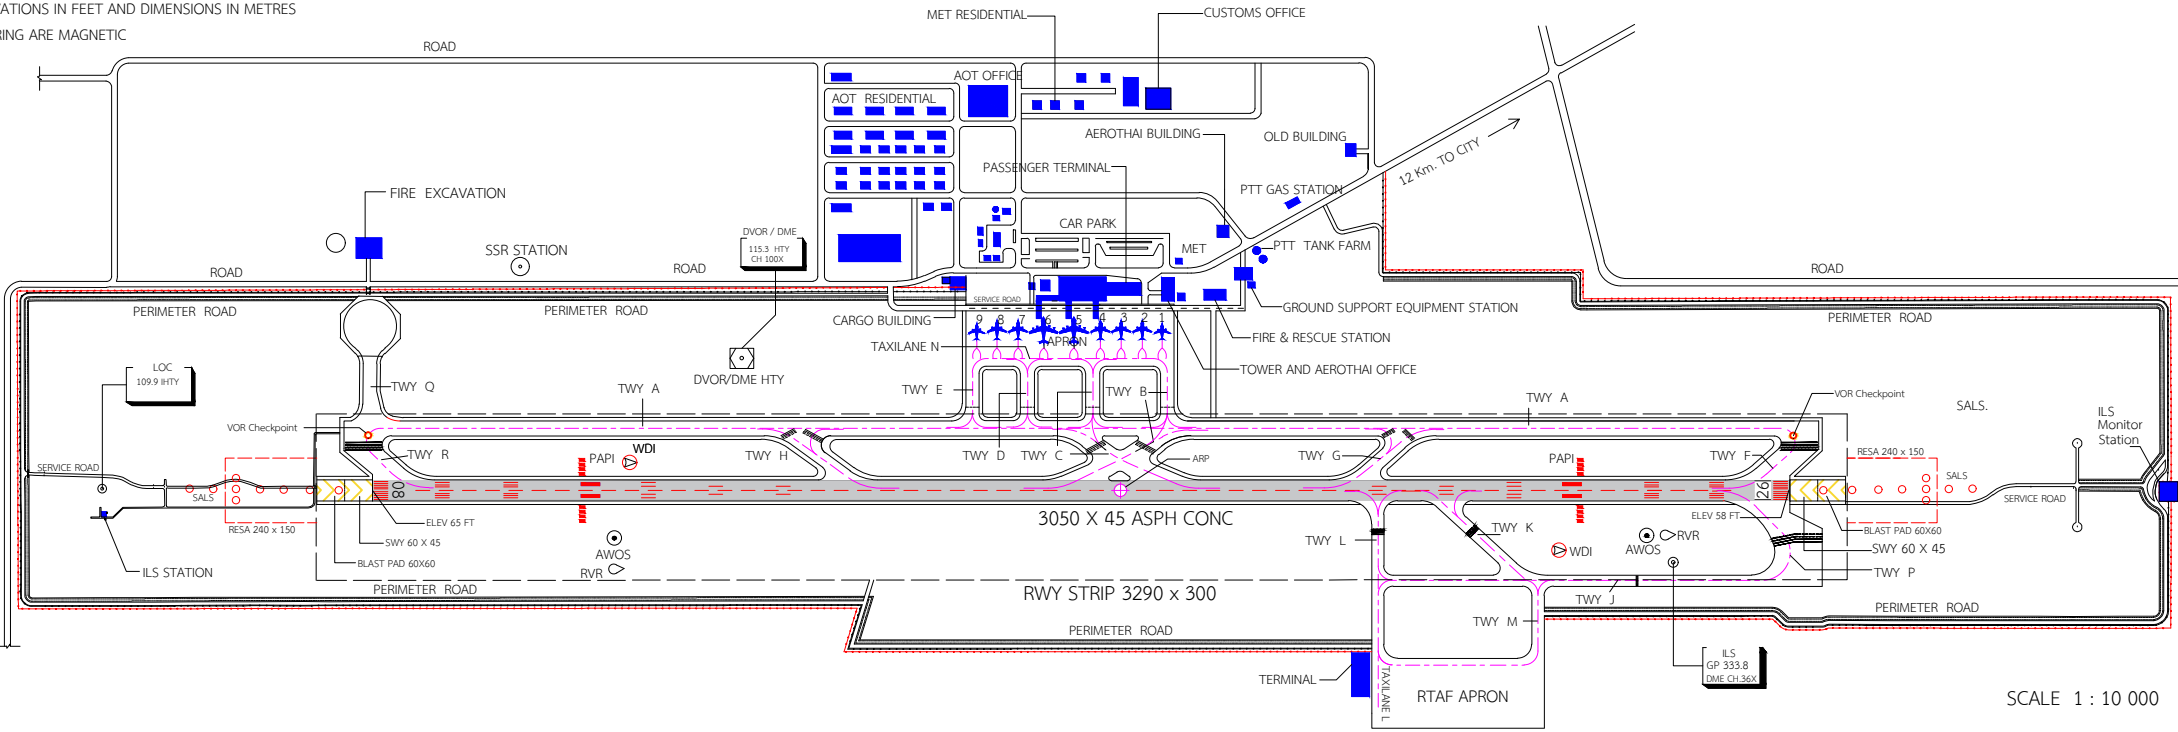

SCALE 1 : 10 000

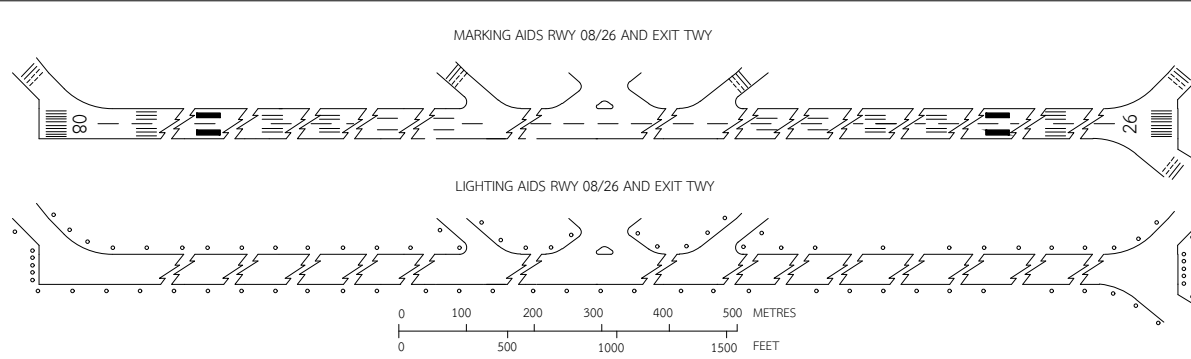

### LEGEND

AERODROME REFERENCE POINT	
BUILDING	
ROADS	
WIND DIRECTION INDICATOR	

METERS	
300	200 100 0
500	1000
FEET	
1000	500 0
3000	

LIGHTING AIDS :	RWY LIGHT : WHITE
	TWY LIGHT : BLUE
	THR/END LIGHT : GREEN/RED
	BIDIRECTIONAL
	STOPWAY LIGHT : RED