


RWY	DIRECTION	THR	BEARING STRENGTH
17	174°	09° 33' 19" N 100° 03' 42" E	PCR 680 F/C/X/T
35	354°	09° 32' 28" N 100° 03' 47" E	
TAXIWAYS		SURFACE TYPE	BEARING STRENGTH
TAXIWAY A		CONCRETE	PCR 440/R/C/W/T
TAXIWAY B		CONCRETE	PCR 400/R/A/W/T
TAXIWAY C		CONCRETE	PCR 480/R/D/W/T
TAXIWAY D		CONCRETE	PCR 410/R/C/W/T
TAXIWAY E		CONCRETE	PCR 450/R/C/W/T
TAXIWAY F		CONCRETE	PCR 570/R/C/W/T
APRONS			BEARING STRENGTH
EAST APRON			PCR 440/R/B/W/T
WEST APRON			PCR 400/R/A/W/T

ELEVATION IN FEET AND DIMENSIONS IN METRES
BEARING ARE MAGNETIC




DVOR/DME
117.6 SMU
CH 123X

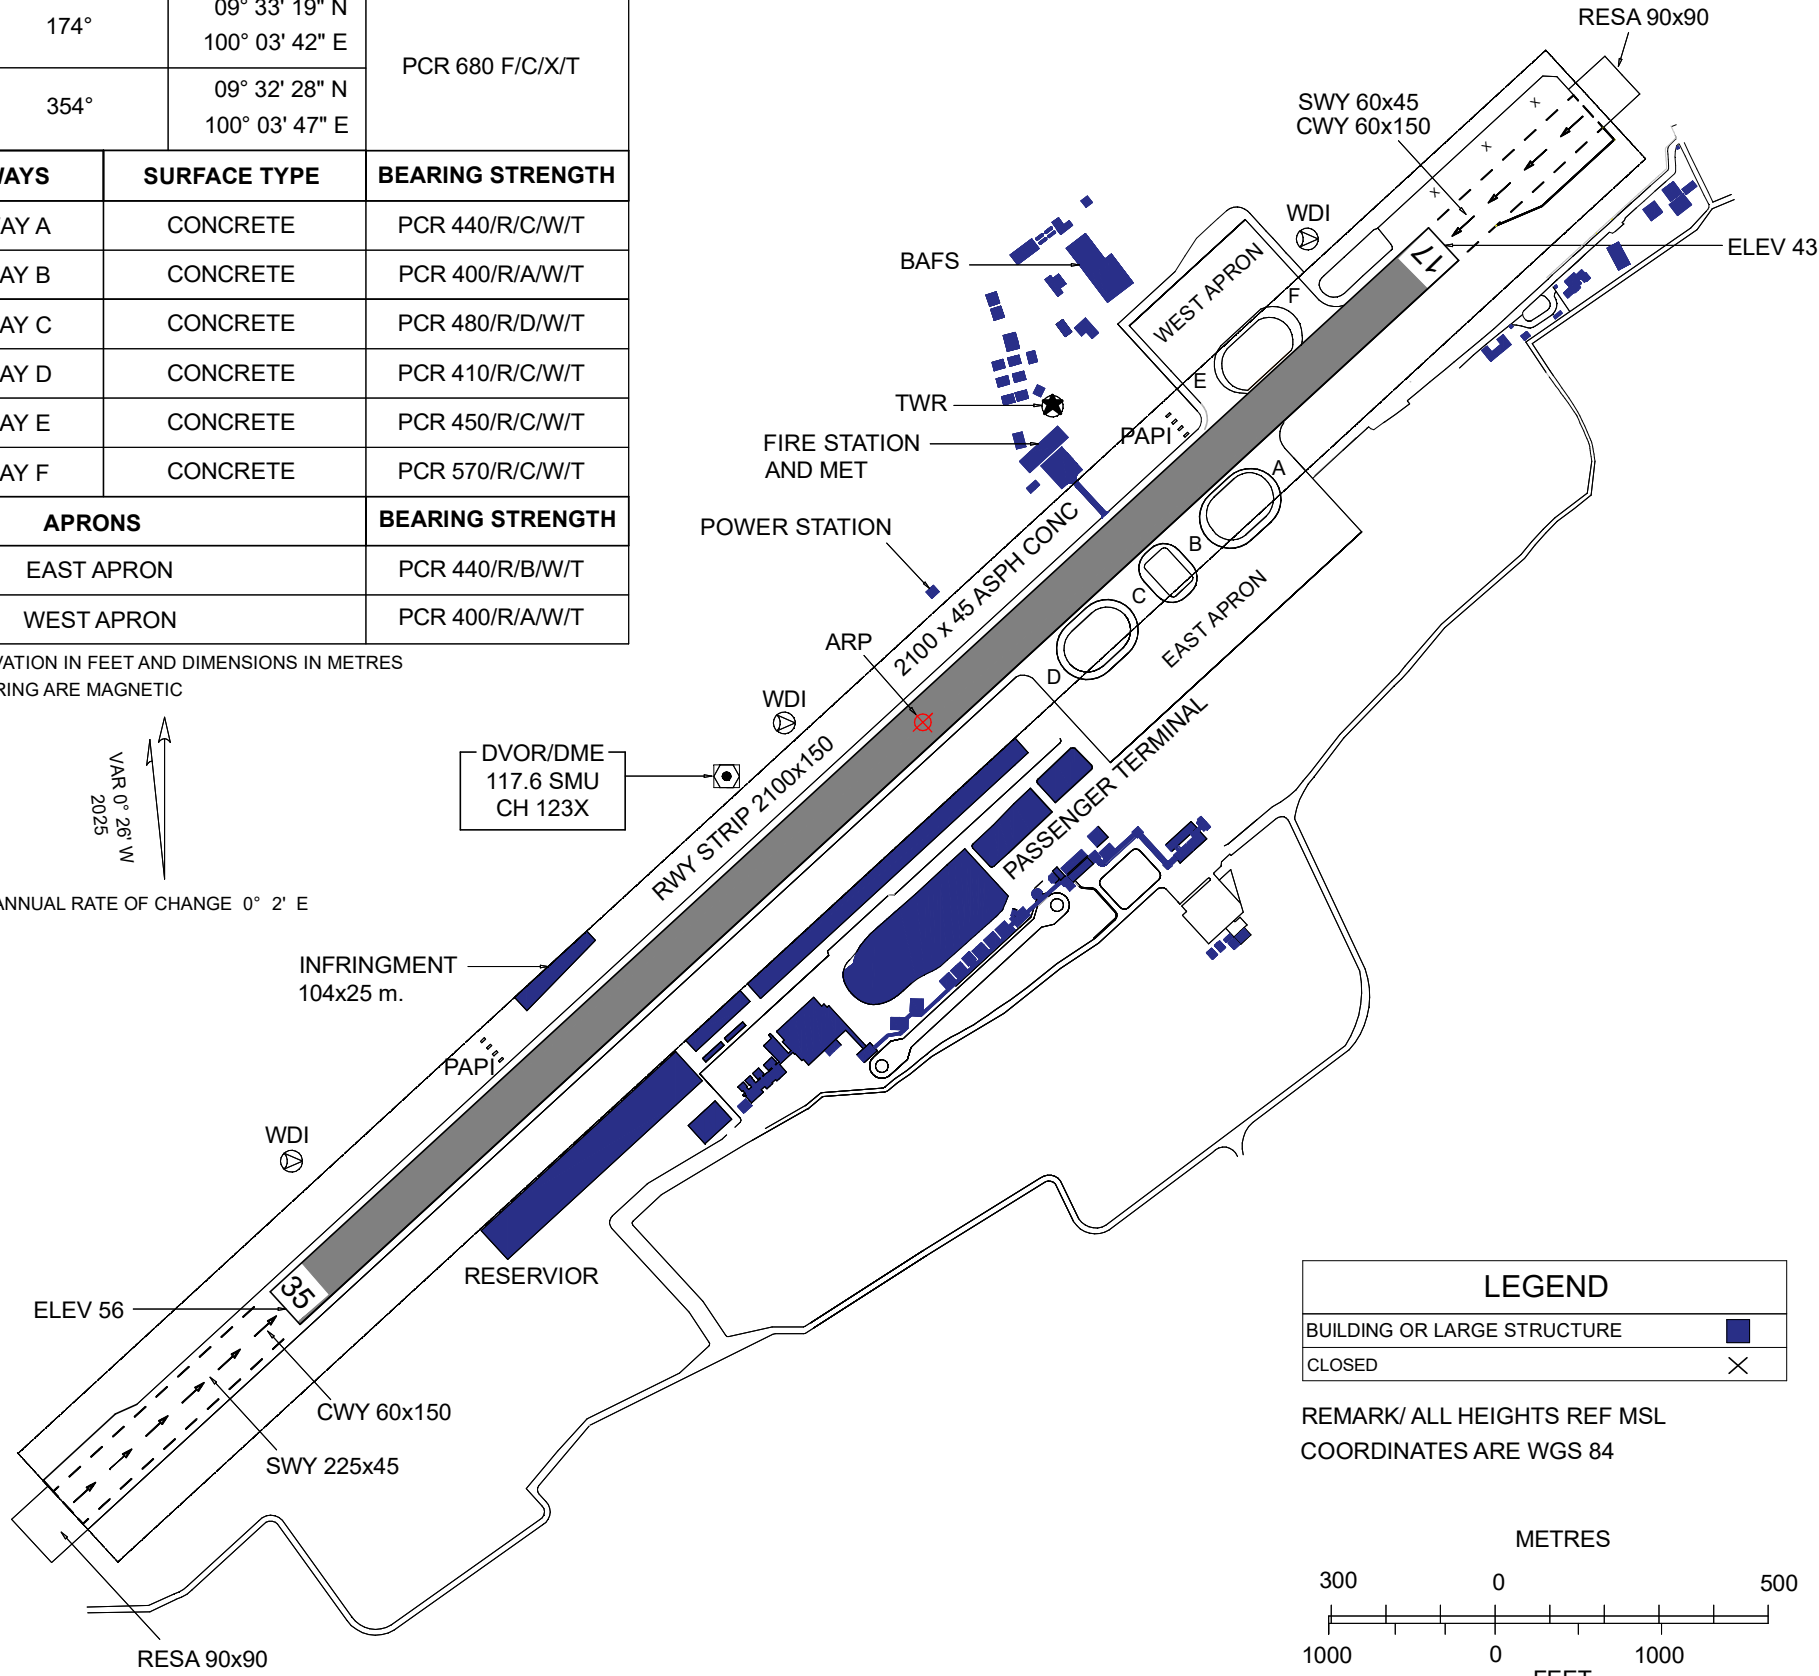


LEGEND	
BUILDING OR LARGE STRUCTURE	■
CLOSED	×

REMARK/ ALL HEIGHTS REF MSL
COORDINATES ARE WGS 84

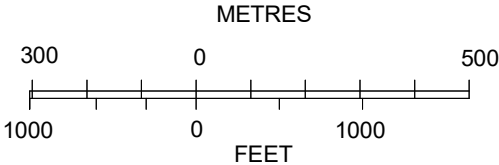


SCALE 1 : 20,000

MARKING AIDS RWY 17/35 AND EXIT TWY

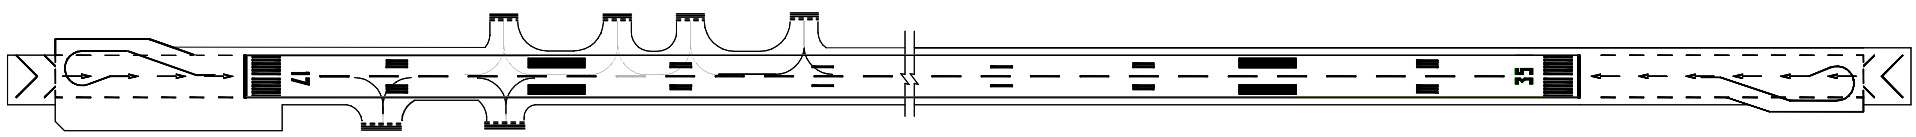

LIGHTING AIDS RWY 17/35 AND EXIT TWY

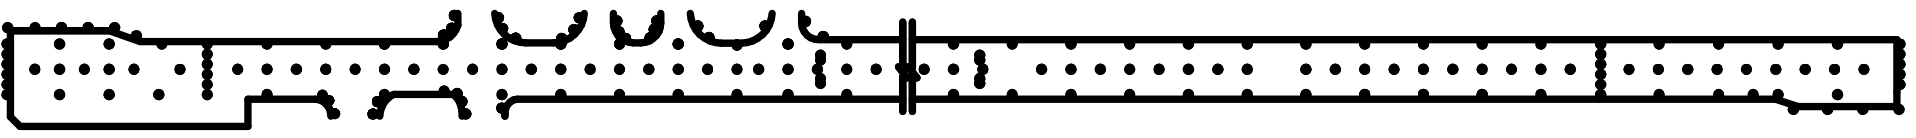

CHANGE : REVISED CHART. MAG VAR UPDATED. TWR FREQ. TRACKS & BEARINGS. INFRINGEMENT CHANGED. WDI ADDED.