


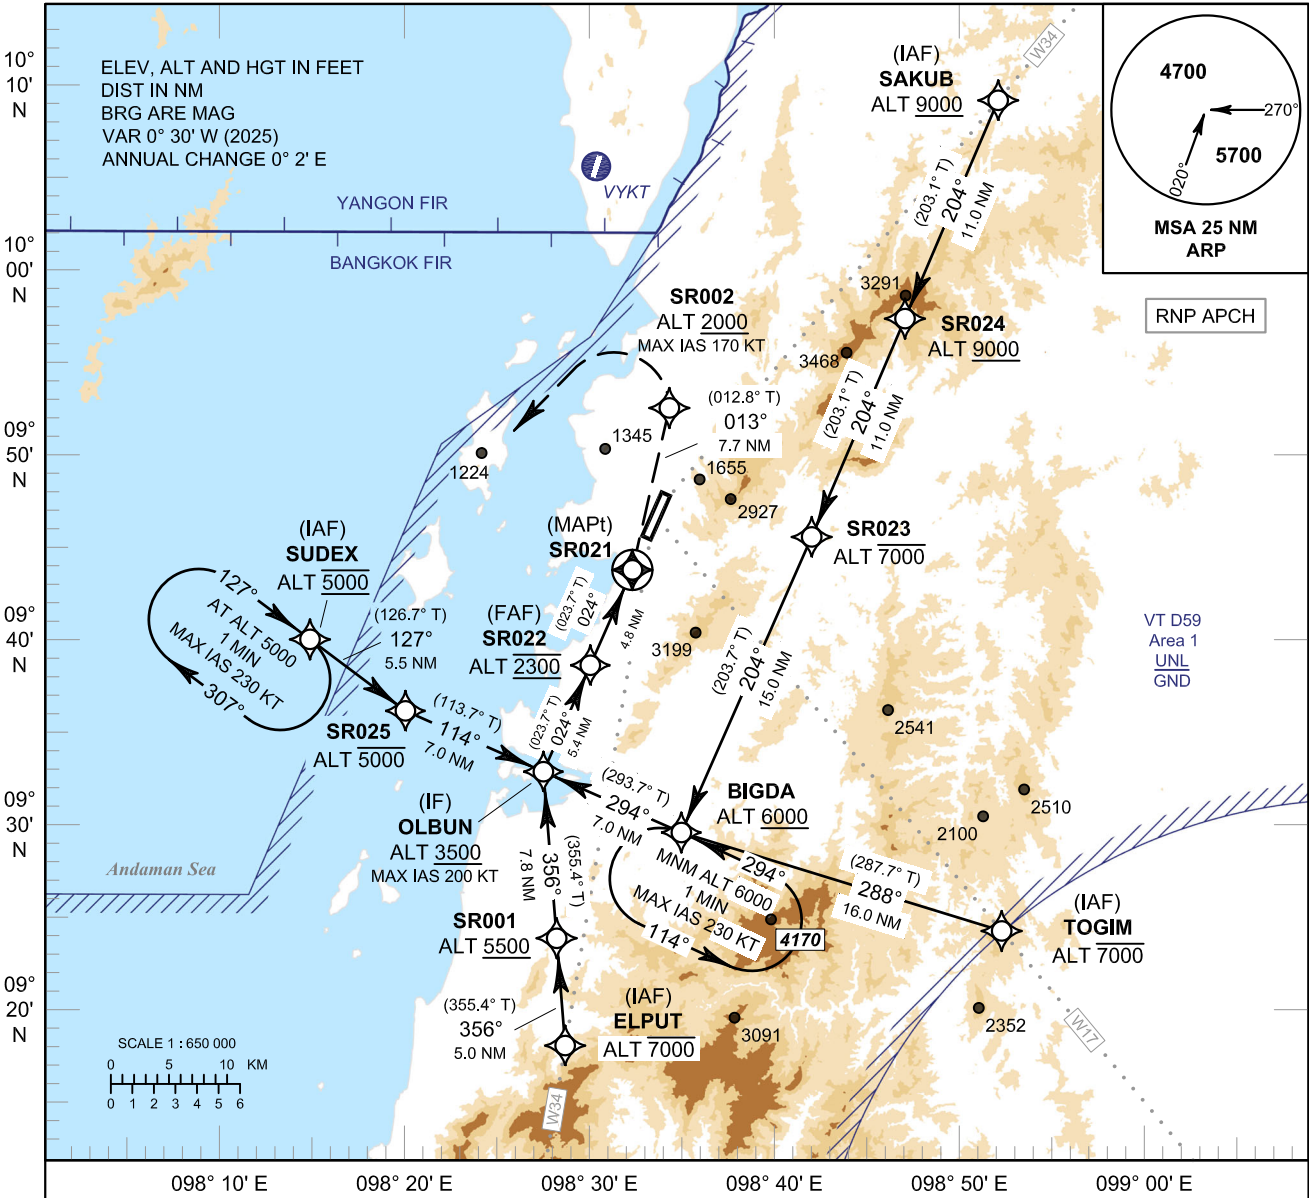

(IF) OLBUN		(FAF) SR022		(MAPt) LNAV only SR021		SR002		MISSED APPROACH : No turn before MAPt. (for LOC only.) MAX IAS 170 KT until after turn. At MAPt, turn left Climb on track 013° to SR002 at minimum 2000 FT, Then turn left directed to SUDEX at 5000 FT and hold or as directed by ATC.															
3500		2300		1000																			
RDH 50 ft		GP 3.0° (5.2%)		OCA																			
TA 11000																							
ELEV 40 FT																							
(THR RWY02)		12.4		5.4		7.0		4.1		2.9		2.2		0		5.2		NM FM THR					
OCA/H		A		B		C		D		NM to NEXT WPT		FAF		6 NM		5 NM		4 NM		3 NM		2.9 NM	
LNAV										Altitude (Height)		2300 (2260)		1985 (1945)		1670 (1630)		1355 (1315)		1035 (995)		1000 (960)	
Circling (OCH AAL)										Ground Speed		knot		70		90		100		120		140	
										Rate of Descent FAF-MAPt 5.2%		ft/min		369		474		527		632		737	
NOTE: * OCA/H 700 (660) FT of RNAV(GNSS) can be achieved for all aircraft categories which can commence a missed approach climb gradient of 5.0% (304 FT/NM) until after turn.																							

CHANGE: PROFILE VIEW.