



INSTRUMENT APPROACH CHART - ICAO **AERODROME ELEV 5 FT**
HEIGHTS RELATED TO THR RWY19R - ELEV 5 FT

APP	: 119.1, 262.5
	: 120.3, 262.5
	: 128.95, 262.5
	: 122.35, 262.5
	: 124.35, 262.5
	: 125.2, 262.5
ARR	: 121.1
	: 126.3
TWR	: 118.2, 274.5
	: 119.0
ARR ATIS	: 133.6, 278.6


BANGKOK / Suvarnabhumi Intl (VTBS)
ILS or LOC z RWY19R
CAT II

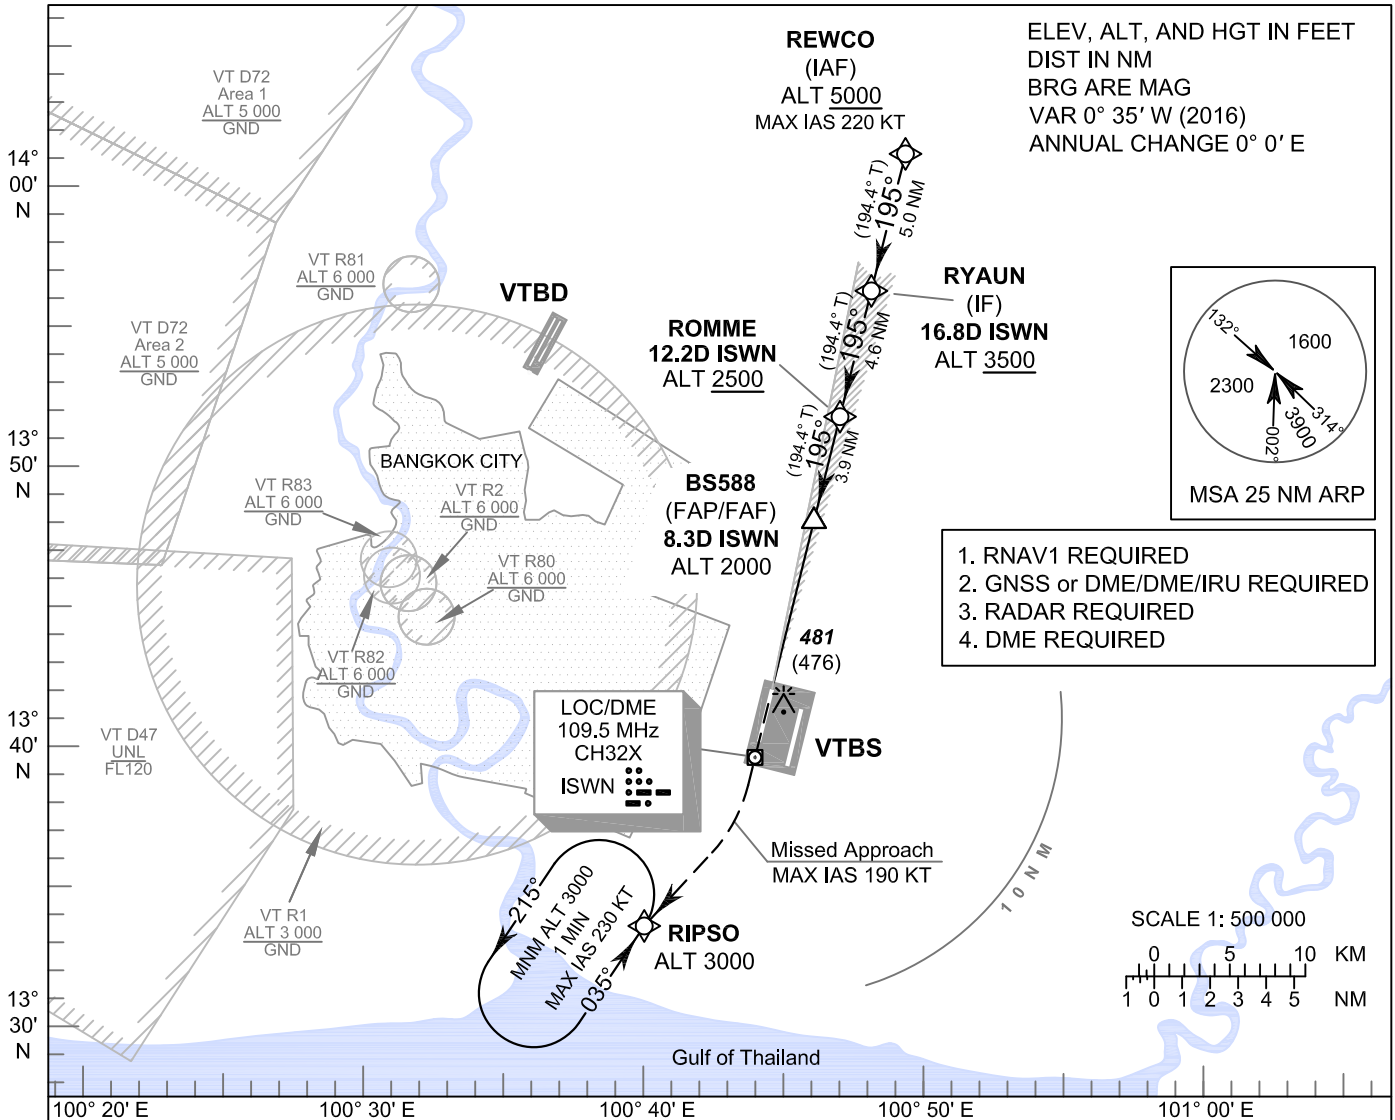

1. RNAV1 REQUIRED
2. GNSS or DME/DME/IRU REQUIRED
3. RADAR REQUIRED
4. DME REQUIRED



MISSED APPROACH:
No turn before MAPt (for LOC only).
Speed restricted to MAX IAS 190 KT until after turn.
 Climb to 1000 FT on track 195°, then climbing right turn direct to RIPSO at 3000 FT and hold or as directed by ATC.
 (If unable to reach 3000 FT at RIPSO, continue climb in the holding pattern.)

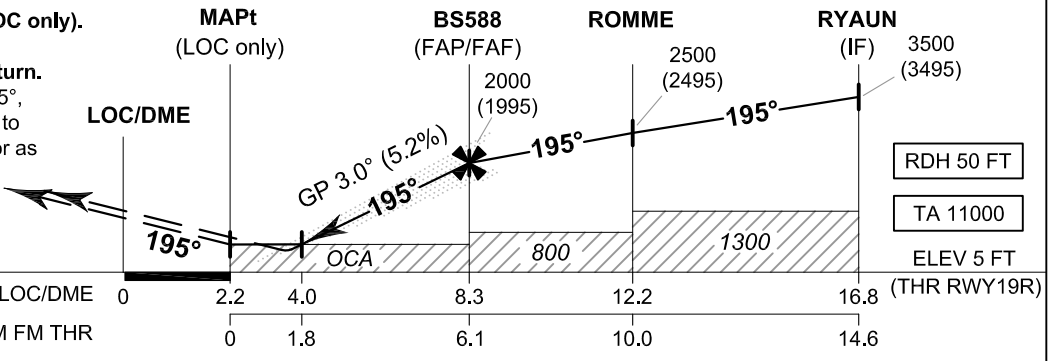

DME FM LOC/DME		0	2.2	4.0	8.3	12.2	16.8						
NM FM THR		0	1.8	6.1	10.0	14.6							
Straight-in Approach	CAT I	205 (200)				GS OUT	Distance (ISWN)	4 D	5 D	6 D	7 D	8 D	FAF
	CAT II	105 (100)					Altitude (Height)	620 (615)	940 (935)	1255 (1250)	1570 (1565)	1890 (1885)	2000 (1995)
LOC only		620 (615)				Ground speed	knot	70	90	100	120	140	160
Circling (OCH AAL)		800 (795)	900 (895)		Rate of descent (5.2%)	ft/min	369	474	527	632	737	843	

CHANGE: APP FREQ. ARR ATIS ADDED.